


Vehicle Benching Position Statement


19-MAY-2025

Lucid Motors prohibits the use of any anchoring system that attaches the vehicle to the frame bench by the use of Pinch-Weld Clamps. Only Lucid Approved frame bench systems and their respective anchoring processes should be used when attaching the vehicle to the frame bench. Prior to performing any structural replacement, reference and follow the guidelines found in the [Mandatory 3D Digital Measuring for Vehicles Requiring Structural Repair](#).

Lucid Motors requires that a minimum of six base locations be fixed when securing a vehicle to the frame bench for all Lucid Motors approved frame benches. The six mandatory points (as shown in the image below) are four rear Subframe Mounting Locations and two front Subframe Mounting Locations. Any additional structural components that will be replaced must be fixed at all applicable anchoring points as defined by their respective frame bench data sheets.

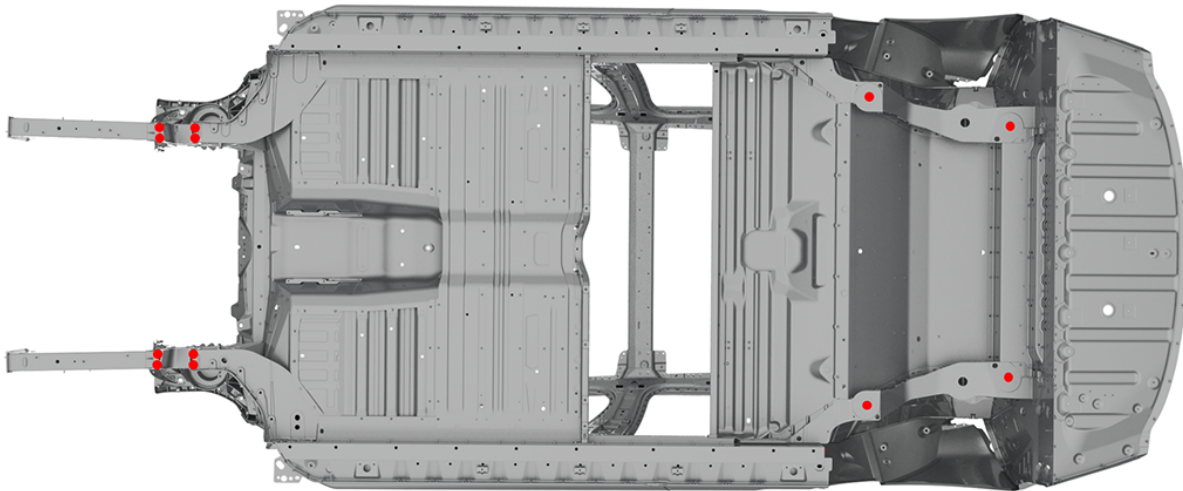

In addition to the points above, Car-O-Liner is a Lucid Motors approved frame bench that utilizes the 4 datum positions above the jack pad which can be accessed by removing the Jack pads as shown in the image below.

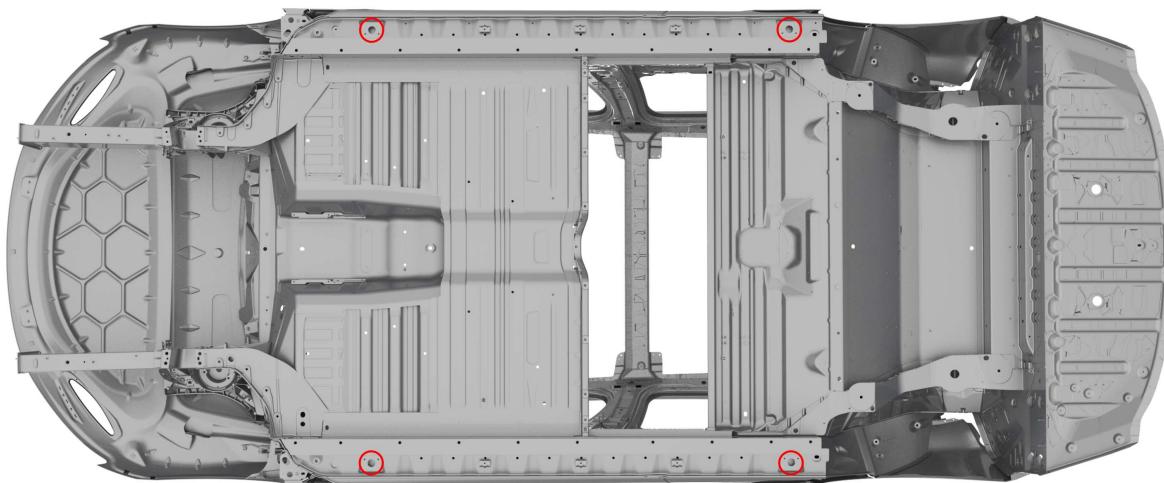

Lucid Motors Approved Frame benches:

- Car-Bench: Muraena with c281 kit
- Celette: Sevenne with the Chameleon Universal Kit
- Car-O-Liner: BenchRach 5500 and 5600 or dedicated Carbon fixture with the evo 1, 2, and 3 kits
- Global-Jig: Mobile Systems 6 Meter
- Spensi: 106 - 5 meter and 106EXT - 6 meter